


OVERVIEW

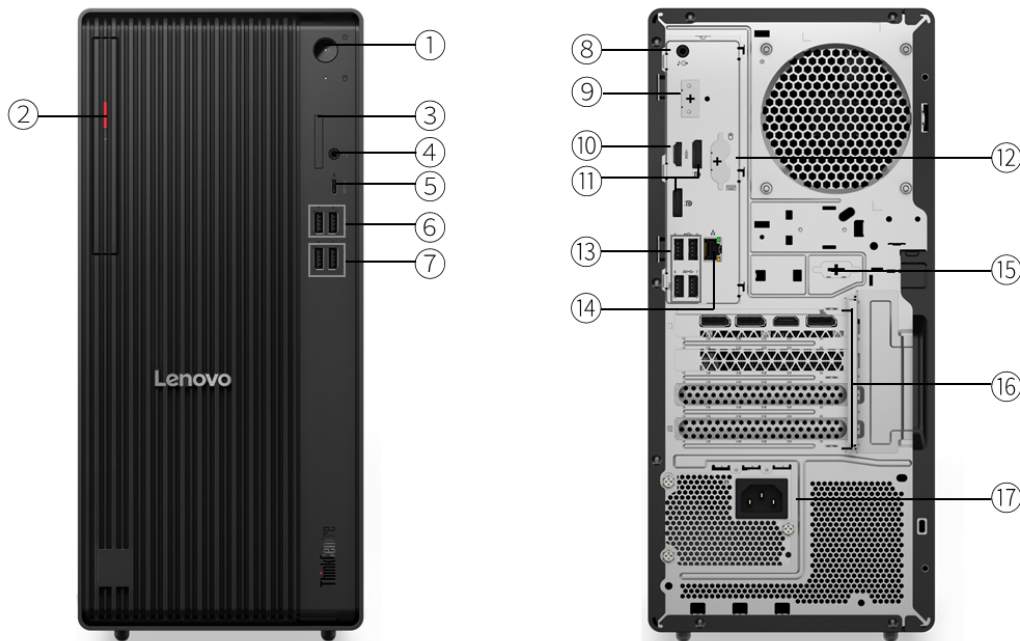

1. Power button	10. HDMI 2.1 TMDs
2. Optical drive *	11. 2x DisplayPort 1.4a
3. Card reader *	12. 2x PS/2 ports (keyboard / mouse) *
4. Headphone / microphone combo jack (3.5mm)	13. 4x USB-A (2x USB 5Gbps + 2x Hi-Speed USB)
5. USB-C (USB 20Gbps), data transfer only	14. Ethernet (RJ-45)
6. 2x USB-A (USB 5Gbps)	15. Serial *
7. 2x USB-A (USB 10Gbps)	16. Optional ports on expansion cards *
8. Audio-out (3.5mm)	17. Power connector
9. Flex IO *	

Notes:

- Items with * are only available on selected models
- More ports are available through the optional expansion cards (not shown on the sample product above)

PERFORMANCE

Processor

Processor Family

Intel® Core™ Ultra 5 / 7 / 9 Processor (Series 2)

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics	NPU	Overall TOPS
Core Ultra 5 225	10 (6 P-core + 4 E-core)	10	P-core 3.3GHz / E-core 2.7GHz	P-core 4.9GHz / E-core 4.4GHz	22MB L2 Cache / 20MB Intel® Smart Cache	Intel® Graphics	Intel® AI Boost, up to 13 TOPS	Up to 23 TOPS
Core Ultra 5 225F	10 (6 P-core + 4 E-core)	10	P-core 3.3GHz / E-core 2.7GHz	P-core 4.9GHz / E-core 4.4GHz	22MB L2 Cache / 20MB Intel® Smart Cache	-	Intel® AI Boost, up to 13 TOPS	Up to 19 TOPS
Core Ultra 5 235	14 (6 P-core + 8 E-core)	14	P-core 3.4GHz / E-core 2.9GHz	P-core 5.0GHz / E-core 4.4GHz	26MB L2 Cache / 24MB Intel® Smart Cache	Intel® Graphics	Intel® AI Boost, up to 13 TOPS	Up to 27 TOPS
Core Ultra 5 245	14 (6 P-core + 8 E-core)	14	P-core 3.5GHz / E-core 3.0GHz	P-core 5.1GHz / E-core 4.5GHz	26MB L2 Cache / 24MB Intel® Smart Cache	Intel® Graphics	Intel® AI Boost, up to 13 TOPS	Up to 29 TOPS
Core Ultra 7 265	20 (8 P-core + 12 E-core)	20	P-core 2.4GHz / E-core 1.8GHz	Max Turbo up to 5.3GHz / P-core 5.2GHz / E-core 4.6GHz	36MB L2 Cache / 30MB Intel® Smart Cache	Intel® Graphics	Intel® AI Boost, up to 13 TOPS	Up to 33 TOPS
Core Ultra 7 265F	20 (8 P-core + 12 E-core)	20	P-core 2.4GHz / E-core 1.8GHz	Max Turbo up to 5.3GHz / P-core 5.2GHz / E-core 4.6GHz	36MB L2 Cache / 30MB Intel® Smart Cache	-	Intel® AI Boost, up to 13 TOPS	Up to 25 TOPS
Core Ultra 9 285	24 (8 P-core + 16 E-core)	24	P-core 2.5GHz / E-core 1.9GHz	Max Turbo up to 5.6GHz / P-core 5.4GHz / E-core 4.6GHz	40MB L2 Cache / 36MB Intel® Smart Cache	Intel® Graphics	Intel® AI Boost, up to 13 TOPS	Up to 36 TOPS

AI (Artificial Intelligence)

AI PC Category

AI PC^[1]

NPU

Integrated Intel® AI Boost, up to 13 TOPS

Notes:

[1] AI PCs have a NPU capable of 10+ TOPs to run the Copilot assistant by pressing the optional Microsoft® Copilot key or using Win + C.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 IoT Enterprise LTSC 2024
- Ubuntu Linux
- No preload operating system

Graphics

Graphics^[1]**

Graphics	Type	Memory	AI TOPS (Peak)	Max Resolution	Connector	Key Features
Intel® Graphics	Integrated	Shared	-	5120x2880@60Hz(DP), 4096x2160@60Hz(HDMI®), 3840x2160@60Hz[Flex IO(HDMI®) / Flex IO(DP)], 3840x2160@60Hz[Flex IO(USB-C®)], 1920x1080@60Hz[Flex IO(VGA)]	2x DP 1.4a (HBR3, DSC), 1x HDMI® 2.1 TMDS, 1x Flex IO (VGA / DP 1.2 / HDMI® 2.1 TMDS / USB-C®)	DirectX® 12
Intel® Arc™ A310 LP Graphics	Discrete	4GB GDDR6	60.2 TOPS	7680x4320@60Hz(DP)	2x DisplayPort™ 2.0	DirectX® 12, OpenGL 4.6
NVIDIA® GeForce RTX™ 3050	Discrete	6GB GDDR6	108 TOPS	7680x4320@60Hz(HDMI®), 7680x4320@120Hz(DP)	1x HDMI® 2.1 FRL, 1x DP 1.4a	DirectX® 12, OpenGL 4.6
NVIDIA® GeForce RTX™ 5060	Discrete	8G GDDR7	614	7680x4320@120Hz with DSC(HDMI®); 7680x4320@165Hz with DSC(DP)	3x DP 2.1b UHBR20, 1x HDMI® 2.1b FRL	DirectX® 12, OpenGL 4.6
NVIDIA® GeForce RTX™ 5070	Discrete	12G GDDR7	988 TOPS	7680x4320@120Hz with DSC(HDMI®), 7680x4320@165Hz with DSC(DP)	3x DP 2.1b UHBR20, 1x HDMI® 2.1b FRL	DirectX® 12, OpenGL 4.6

Notes:

[1] The information of integrated graphics are not applicable for the models with processor which has no integrated graphics inside (for the details, please refer to processor section).

Monitor Support**Monitor Support**

Supports up to 4 independent displays via onboard ports (2x DP, 1x HDMI®, and 1x optional Flex IO), more displays support via discrete graphics

Chipset**Chipset**

Intel® Q870 chipset

Memory**Max Memory^[1]**

Up to 128GB DDR5

Memory Slots

Four DDR5 UDIMM slots, dual-channel capable

Memory Type**

- DDR5-4400^[2]
- DDR5-4800^[3]
- DDR5-5600

Memory Protection

Non-ECC

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

[2] Installed memory is actually DDR5-5600 but may run as DDR5-4400 depending on the memory support capability of processor.

[3] Installed memory is actually DDR5-5600 but may run as DDR5-4800 depending on the memory support capability of

processor.

Storage

Max Storage Support^[1]

Up to six drives, 2x 3.5" HDD + 1x 2.5" HDD + 3x M.2 SSD

- 3.5" HDD up to 2TB
- 2.5" HDD bay is only for customer self upgrade
- M.2 SSD up to 2TB each^[2]

Storage Type^{***}

Disk Type	Interface	RPM	Security
3.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	-	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Performance	-	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 5.0 x4 Performance	-	Opal 2.0

RAID

RAID 0/1/5 support

Notes:

[1] The max capacity of each disk type is based on the test results with current Lenovo® storage offerings.

[2] 2.5" HDD bay and 2nd 3.5" bay are optional parts, and 2.5" HDD bay is only for customer self upgrade purpose and the hard drive is sold separately.

Removable Storage

Optical^{**}

- DVD-ROM, SATA connector, slim (9.0mm)
- DVD burner (DVD±RW), SATA connector, slim (9.0mm)
- None

Card Reader

- 3-in-1 card reader (SD, SDHC, SDXC)
- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC623-CG codec

Speakers

Single speaker, 2W x1

Power Supply

Power Supply^{**}

Power	Type	Efficiency	Key Features
260W	Fixed	90%	100-240V, 50-60Hz
310W	Fixed	92%	100-240V, 50-60Hz
400W	Fixed	92%	100-240V, 50-60Hz
500W	Fixed	92%	100-240V, 50-60Hz

DESIGN

Input Device

Keyboard^{**}

- Lenovo® Calliope Keyboard (USB connector), black
- Lenovo® Traditional Keyboard (USB connector), black
- No keyboard

Mouse

- Lenovo® Calliope Mouse (USB connector), black
- No mouse

Mechanical**Form Factor**

Tower (17L)

Dimensions (WxDxH)^[1]

170 x 298 x 376 mm (6.7 x 11.7 x 14.8 inches)

Packaging Dimensions (WxDxH)

275 x 395 x 540 mm (10.8 x 15.6 x 21.4 inches)

Weight^[2]

6.5 kg (14.3 lbs, maximum configuration)

Packaging Weight

9.8 kg (21.6 lbs, maximum configuration)

Case Color

Black

Bays

- 1x 2.5" disk bay (optional)
- 1x 3.5" disk bay
- 1x 3.5" disk bay (optional, or bay comes with disk)
- 1x slim ODD bay

Expansion Slots

- One PCIe® 5.0 x16
- One PCIe® 4.0 x16 (x4 signal)
- Two PCIe® 3.0 x1
- Four M.2 slots (one for WLAN, three for SSD / discrete NPU)

EOU

Toolless cover, memory, disk, optical, extension card assembly / removal^[3]

Stand

No stand

Others

- (Optional) Dust filter
- Supports Smart Power On

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[3] To comply with UL 4200A, the toolless features are not available for the following countries:

Argentina, Belize, Bolivia, Canada, Caribbean Group, Chile, Colombia, Costa Rica, Dominican Republic, Ecuador, El Salvador, Guatemala, Honduras, Mexico, Nicaragua, Panama, Paraguay, Peru, TAA, Uruguay, USA, Venezuela.

CONNECTIVITY**Network****WLAN + Bluetooth®****

- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, Intel® vPro® technology support, M.2 card
- Intel® Wi-Fi® 7 BE200, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4, Intel® vPro® technology support, M.2 card
- No WLAN and Bluetooth®
- Realtek® Wi-Fi® 6E RTL8852CE, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card

Onboard Ethernet

Gigabit Ethernet, Intel® Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN

Optional Ethernet

- 2.5 Gigabit Ethernet, Realtek® RTL8125BGS, 1x RJ-45, PCIe® x1
- No optional Ethernet

Ports^[1]**Front Ports**

- 1x USB-C® (USB 20Gbps / USB 3.2 Gen 2x2), with 15W charging
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 2x USB-A (USB 10Gbps / USB 3.2 Gen 2)
- 1x headphone / microphone combo jack (3.5mm)

Optional Front Ports

1x card reader

Rear Ports^[2]

- 2x USB-A (Hi-Speed USB / USB 2.0)
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 1x HDMI® 2.1 TMDS
- 2x DisplayPort™ 1.4a (HBR3, DSC)
- 1x Ethernet (RJ-45)
- 1x line-out (3.5mm)

Optional Rear Ports***

- 1x USB-C® (USB 5Gbps / USB 3.2 Gen 1), with DisplayPort™ function and 5V@3A charging (Flex IO)
- 1x HDMI® 2.1 TMDS (Flex IO)
- 1x DP 1.2 (Flex IO)
- 1x VGA (Flex IO)
- 2x USB-A (Hi-Speed USB / USB 2.0), via 2-port adapter
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1), via 2-port USB expansion card, PCIe® x1
- 1x 2.5GbE RJ-45, via additional PCIe® adapter
- 1x parallel
- 1x serial
- 1x 2nd serial
- 2x PS/2

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

Thunderbolt™ 5: 80 Gbit/s (bidirectional), up to 120 Gbit/s in bandwidth boost mode for video-intensive applications.

[2] For video ports on discrete graphics, please see [graphics section](#)

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

Physical Locks

- (Optional) E-lock
- (Optional) Smart Cable Clip
- Kensington® Security Slot™, 3 x 7 mm
- Padlock Loop

Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

Fingerprint Reader

No fingerprint reader

BIOS Security

- Administrator password
- Hard disk password
- Power-on password
- Absolute persistence module
- Boot sequence control
- Boot without keyboard and mouse
- Cover tamper detected^[1]
- Certificate-based BIOS authentication
- Configuration change detection
- Individual USB port disablement
- Intel® BIOS guard
- Secure wipe
- Secure boot
- Self-healing BIOS (Level 2)
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- More BIOS security features, please visit [BIOS Simulator](#)

Notes:

[1] Only available for the models with Chassis Intrusion Switch

MANAGEABILITY

System Management

System Management^[1]

- Intel® vPro® Enterprise
- Non-vPro®

Notes:

[1] Intel® vPro® offers a superset of DASH's defined capabilities.

SERVICE

Warranty^[1]

Base Warranty**

- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://support.lenovo.com/warrantylookup/warrantypolicy>.

ACCESSORIES

Bundled Accessories

Bundled Accessories***

- DP to DVI dongle
- DP to HDMI® dongle
- HDMI® to VGA dongle
- Smart Cable (USB-A to USB-C®)

OPERATING REQUIREMENTS

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

ENVIRONMENTAL

Sustainability

Material^[1]

97% PIC EPE cushion and 30% OBP bag FSC carton in packaging
85% PCC ABS in chassis
95% PCC ABS in KB/mouse
65% PCC ABS (EOS 2.4G wireless)

Notes:

[1] PCC: Post Consumer Content, recycled materials from customers.
PIC: Post Industry Content, recycled materials from internal factories.
EPE: Expanded Polyethylene.
OBP: Ocean Bound Plastic, reducing plastic spill into the sea.
FSC: Forest Stewardship Council.

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- (Optional) ENERGY STAR® 9.0
- (Optional) EPEAT™ Gold Registered
- (Optional) TCO Certified 10.0
- ErP Lot 3
- GREENGUARD®
- RoHS compliant

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

Other Certifications

Other Certifications

- (Optional) TÜV Rheinland® Low Noise
- (Optional) TÜV Rheinland® Ultra Low Noise

Mil-Spec Test

MIL-STD-810H military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Solar Radiation, Contamination by Fluids, Salt Fog)

- Feature with ** means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Feature with *** means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS,"

WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.


- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel

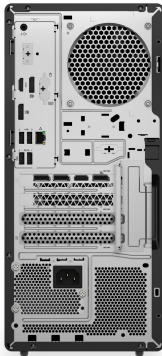

intel



intel



intel



intel