


OVERVIEW

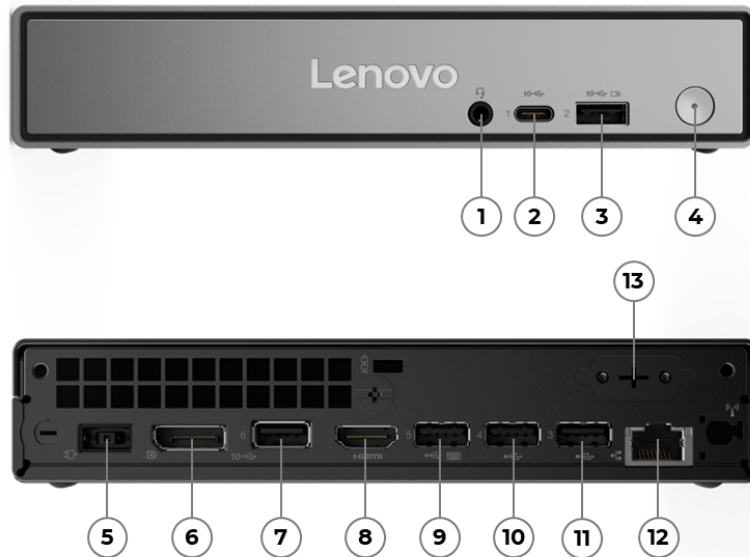

1. headphone / microphone combo jack (3.5mm)	8. HDMI 2.1 TMDs
2. USB-C (USB 10Gbps), data transfer and 5V@3A charging	9. USB-A (Hi-Speed USB), with Smart Power On
3. USB-A (USB 10Gbps), Always On and 5V@2.1A charging	10. USB-A (Hi-Speed USB)
4. Power button	11. USB-A (Hi-Speed USB)
5. Power-in	12. Ethernet (1GbE, RJ-45)
6. DisplayPort 1.4a	13. Punch out port *
7. USB-A (USB 10Gbps)	

Notes:

- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

AMD Ryzen™ 3 / 5 / 7 200 Series, or AMD Ryzen™ AI 5 300 Series Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics	NPU	Overall TOPS
AMD Ryzen™ 3 210	4	8	3.0GHz	4.7GHz	4MB L2 / 8MB L3	AMD Radeon™ 740M	-	-
AMD Ryzen™ 3 212 ^[1]	4	8	3.0GHz	4.7GHz	4MB L2 / 8MB L3	AMD Radeon™ 740M	AMD Ryzen™ AI, up to 16 TOPS	-
AMD Ryzen™ 5 220	6	12	3.2GHz	4.9GHz	6MB L2 / 16MB L3	AMD Radeon™ 740M	-	-
AMD Ryzen™ 5 230 ^[2]	6	12	3.5GHz	4.9GHz	6MB L2 / 16MB L3	AMD Radeon™ 760M	AMD Ryzen™ AI, up to 16 TOPS	Up to 31 TOPS
AMD Ryzen™ 7 250	8	16	3.3GHz	5.1GHz	8MB L2 / 16MB L3	AMD Radeon™ 780M	AMD Ryzen™ AI, up to 16 TOPS	Up to 38 TOPS
AMD Ryzen™ AI 5 330	4	8	2.0GHz	4.5GHz	4MB L2 / 8MB L3	AMD Radeon™ 820M	AMD Ryzen™ AI, up to 50 TOPS	Up to 56 TOPS

Notes:

[1] AMD Ryzen™ 3 212 will be available on special bid

[2] AMD Ryzen™ 5 230 will be available on special bid

AI (Artificial Intelligence)

AI PC Category**

- Copilot+ PC (models with AMD Ryzen™ AI 5 330 processor)
- AI PC (models with AMD Ryzen™ 7 250 processor)
- Non-AI PC

NPU**

- Integrated AMD Ryzen™ AI, up to 50 TOPS^[1]
- Integrated AMD Ryzen™ AI, up to 16 TOPS^[2]
- None

Notes:

[1] Only for the models with AMD Ryzen™ AI 5 330 processor.

[2] Only for the models with AMD Ryzen™ 7 250 processor.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Ubuntu Linux
- No preload operating system

Graphics

Graphics**^[1]

Graphics	Type	Memory	Max Resolution	Connector	Key Features
AMD Radeon™ 740M	Integrated	Shared	4096x2160@60Hz(HDMI®), 4096x2160@60Hz(DP 1.4a), 4096x2160@60Hz(DP 1.2),	1x HDMI® 2.1 TMDS, 1x DisplayPort™ 1.4a, 1x optional port (VGA / 2nd DP 1.2 / 2nd HDMI® 2.1 TMDS)	DirectX® 12

			1920x1200@60Hz(VGA)		
AMD Radeon™ 780M	Integrated	Shared	4096x2160@60Hz(HDMI®), 4096x2160@60Hz(DP 1.4a), 4096x2160@60Hz(DP 1.2), 1920x1200@60Hz(VGA)	1x HDMI® 2.1 TMDS, 1x DisplayPort™ 1.4a, 1x optional port (VGA / 2nd DP 1.2 / 2nd HDMI® 2.1 TMDS)	DirectX® 12
AMD Radeon™ 820M	Integrated	Shared	4096x2160@60Hz(HDMI®), 4096x2160@60Hz(DP 1.4a), 4096x2160@60Hz(DP 1.2), 1920x1200@60Hz(VGA)	1x HDMI® 2.1 TMDS, 1x DisplayPort™ 1.4a, 1x optional port (VGA / 2nd DP 1.2 / 2nd HDMI® 2.1 TMDS)	DirectX® 12

Notes:

[1] The information of integrated graphics are not applicable for the models with processor which has no integrated graphics inside (for the details, please refer to processor section).

Monitor Support

Monitor Support

Supports up to 3 independent displays via (onboard DP, onboard HDMI®, and one optional port [VGA / 2nd DP / 2nd HDMI®])

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory^[1]

Up to 64GB DDR5-5600

Memory Slots

Two DDR5 SODIMM slots, dual-channel capable

Memory Type

DDR5-5600

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

Storage

Max Storage Support^[1]

Up to two drives, 2x M.2 SSD
• M.2 SSD up to 1TB each

Storage Type^{***}

Disk Type	Interface	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	-
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	Opal 2.0

Notes:

[1] The max capacity of each disk type is based on the test results with current Lenovo® storage offerings.

Removable Storage

Optical

None

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC256 codec

Speakers

Single speaker, 2W x1

Power Supply

Power Supply**

Power	Type	Efficiency	Key Features
65W	Adapter	89%	Autosensing
90W	Adapter	89%	Autosensing
135W	Adapter	90%	Autosensing
No power adapter	-	-	-

DESIGN

Input Device

Keyboard**

- Lenovo® Calliope Keyboard (USB connector), black
- Wireless EOS Keyboard, black
- No keyboard

Mouse**

- Lenovo® Calliope Mouse (USB connector), black
- Lenovo® Fingerprint Mouse (USB connector), black
- Wireless EOS Mouse, black
- No mouse

Mechanical

Form Factor

Tiny (1L)

Dimensions (WxDxH)^[1]

Models	Dimensions
Tiny only (without rubber feet)	179 x 182.9 x 34.5 mm (7.05 x 7.2 x 1.36 inches)
Tiny only (with rubber feet)	179 x 182.9 x 36.5 mm (7.05 x 7.2 x 1.44 inches)

Packaging Dimensions (WxDxH)**

- Tiny only: 240 x 250 x 186 mm (9.45 x 9.84 x 7.32 inches)
- Tiny with EOS keyboard: 532 x 250 x 128 mm (20.94 x 9.84 x 5.04 inches)
- Tiny with Calliope keyboard: 492 x 250 x 128 mm (19.37 x 9.84 x 5.04 inches)

Weight^[2]

Around 0.89 kg (1.96 lbs)

Packaging Weight**

- Tiny only: 2.03 kg (4.48 lbs)
- Tiny with EOS keyboard: 3.28 kg (7.23 lbs)
- Tiny with Calliope keyboard: 3.44 kg (7.58 lbs)

Case Color

Raven black

Expansion Slots

Three M.2 slots (one for WLAN, two for SSD)

EOU

(Optional) toolless chassis open (toolless chassis screw required)

Stand

- Vertical stand
- No stand

Mounting

- Supports VESA mount 100mm
- None

Others

(Optional) Power adapter cage

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

WLAN + Bluetooth®**[1]

- MediaTek Wi-Fi® 6 MT7920, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.2, M.2 card
- Realtek® Wi-Fi® 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.2, M.2 card
- MediaTek Wi-Fi® 7 MT7925, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4, M.2 card
- Realtek® Wi-Fi® 7 RTL8922AE, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4, M.2 card
- No WLAN and Bluetooth®

Onboard Ethernet**

- Gigabit Ethernet, Realtek® RTL8111FP, 1x RJ-45, supports DASH and Wake-on-LAN
- Gigabit Ethernet, Realtek® RTL8111K, 1x RJ-45

Optional Ethernet

- 2.5 Gigabit Ethernet, Realtek® RTL8125BGS, 1x RJ-45
- No optional Ethernet

Notes:

[1] Wi-Fi® operation (including Wi-Fi® 6, Wi-Fi® 6E, Wi-Fi® 7, etc.) is subject to the regulatory requirements of each country. Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

Ports^[1]

Front Ports

- 1x USB-C® (USB 10Gbps / USB 3.2 Gen 2), with data transfer and 5V@3A charging
- 1x USB-A (USB 10Gbps / USB 3.2 Gen 2), with Always On and 5V@2.1A charging
- 1x headphone / microphone combo jack (3.5mm)

Rear Ports

- 1x USB-A (USB 10Gbps / USB 3.2 Gen 2)
- 3x USB-A (Hi-Speed USB / USB 2.0)
- 1x HDMI® 2.1 TMDS
- 1x DisplayPort™ 1.4a
- 1x Ethernet (GbE RJ-45)
- 1x Power connector

Optional Rear Ports

Punch out port (one of VGA / DisplayPort™ 1.2 / HDMI® 2.1 TMDS / serial / 2.5GbE RJ-45)

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

- DP to VGA dongle
- None

OPERATING REQUIREMENTS

Operating Environment

Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Relative Humidity

- Operating: 20% to 80%
- Storage: 20% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

ENVIRONMENTAL

Sustainability

Material^[1]

90% PIC recycled plastic EPE cushion or 90% PCC recycled plastic thermal shell with 30% OBP material
30% OBP used in bag
FSC certified paper in packaging

Notes:

[1] PCC: Post Consumer Content, recycled materials from customers.
PIC: Post Industry Content, recycled materials from internal factories.
EPE: Expanded Polyethylene.
OBP: Ocean Bound Plastic, reducing plastic spill into the sea.
FSC: Forest Stewardship Council.

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- (Optional) ENERGY STAR® 9.0
- (Optional) EPEAT™ Gold Registered
- ErP Lot 3/7
- GREENGUARD®
- RoHS / WEEE / REACH

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

Other Certifications

Other Certifications

(Optional) TÜV Rheinland® Ultra Low Noise

- Feature with ** means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Feature with *** means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. **LENOVO PROVIDES THIS PUBLICATION "AS IS", WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES**

OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



Copilot+PC

AMD



Copilot+PC

AMD



Copilot+PC

AMD



Copilot+PC

AMD



Copilot+PC

AMD



Copilot+PC

AMD